


Spannschloss DIN 1480 galvanisch verzinkt Haken/Haken



Material: Stahl S235JR (ehem. St37), galvanisch verzinkt

Ausführung: Gesenkgeschmiedet, metrisches Gewinde

Norm: DIN 1480

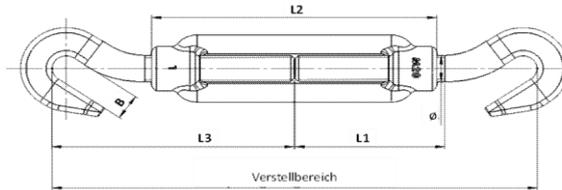

Beispielhaftes Modell

| Artikelnummer | Ø | L1 (mm) | L2 (mm) | L3 (mm) | B (mm) | Spannweg | Verstellbereich |
|---------------|-----|---------|---------|---------|--------|----------|-----------------|
| SSGV0206 | M6 | 55,0 | 110,0 | 77,0 | 8,0 | 86,0 | 154-240 |
| SSGV0208 | M8 | 57,0 | 110,0 | 85,0 | 10,0 | 80,0 | 170-250 |
| SSGV0210 | M10 | 68,0 | 125,0 | 106,0 | 12,0 | 89,0 | 212-301 |
| SSGV0212 | M12 | 70,0 | 125,0 | 117,0 | 15,0 | 83,0 | 234-317 |
| SSGV0214 | M14 | 75,0 | 140,0 | 124,0 | 19,0 | 90,0 | 248-338 |
| SSGV0216 | M16 | 88,0 | 170,0 | 144,0 | 19,0 | 116,0 | 288-404 |
| SSGV0220 | M20 | 105 | 200,0 | 170 | 20,0 | 132,0 | 340-472 |
| SSGV0222 | M22 | 105 | 220,0 | 200 | 26,0 | 146,0 | 400-546 |
| SSGV0224 | M24 | 135 | 255,0 | 215 | 26,0 | 177,0 | 430-607 |
| SSGV0230 | M30 | 135 | 255,0 | 240 | 31,0 | 165,0 | 480-645 |
| SSGV0236 | M36 | 160 | 295,0 | 275 | 44,0 | 185,0 | 550-735 |

Die Angaben können je Artikel leichte Abweichungen enthalten.

